




KLÍNOVÉ ŘEMENICE PRO KUŽELOVÁ UPÍNAČÍ POUZDRA „TAPER - LOCK“




Prov. 1

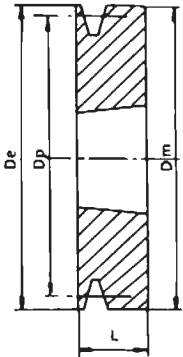


Prov. 2

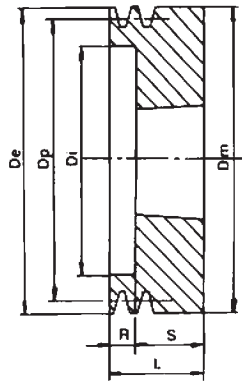


Prov. 3

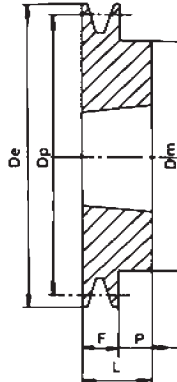


Prov. 4

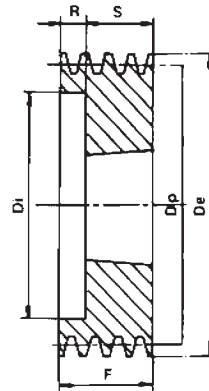


Prov. 5

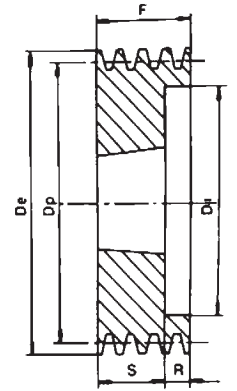


Prov. 6

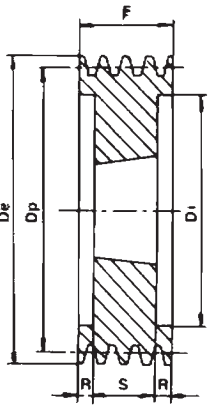


Prov. 7

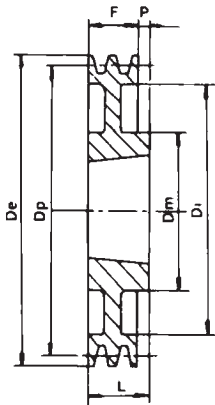


Prov. 8

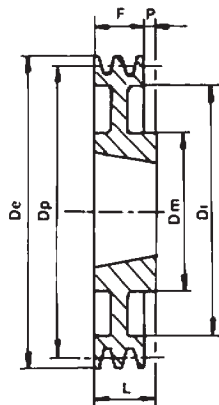


Prov. 8a

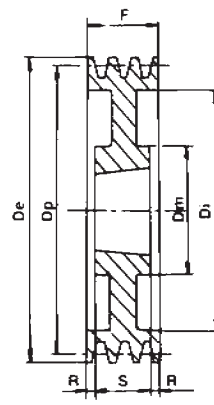


Prov. 9

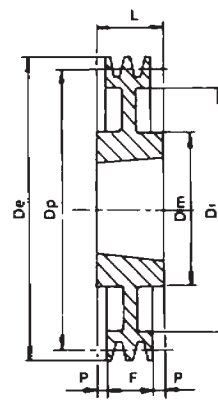


Prov. 10

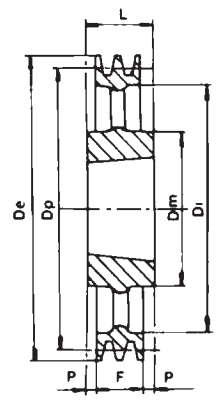


Prov. 11

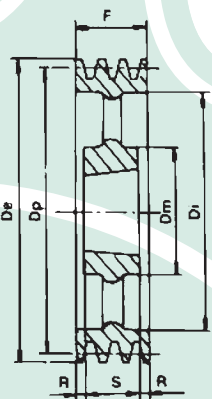


Prov. 12

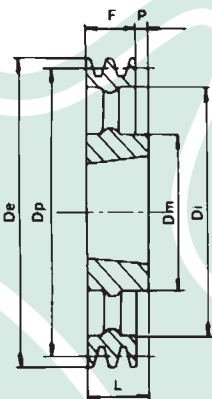


Prov. 13

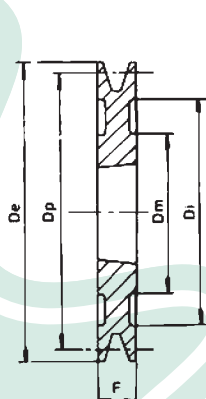


Prov. 14

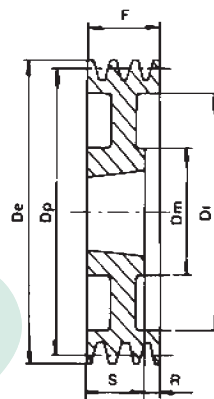

Prov. 15

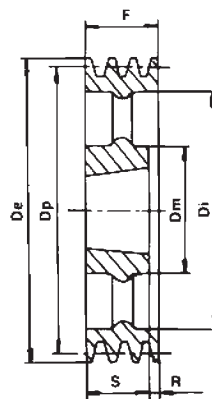

Prov. 16

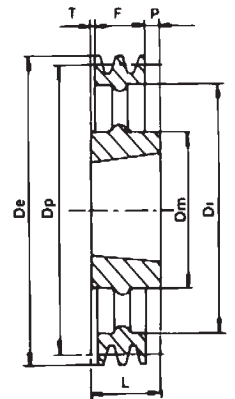

Prov. 17

Výpočtový Ø Dp	Počet drážek	Provedení	Upínací pouzdro	Venkovní ØDe	Di	Dm	F	L	P	R	S
100	1	1	1610	107,6			25				
	2	6	1610	"	57		44			19	25
106	1	1	1610	113,6			25				
	2	6	1610	"	67		44			19	25
	3	6	1610	"	67		63			38	25
112	1	1	1610	119,6			25				
	2	6	1610	"	72		44			19	25
	3	6	1610	"	72		63			38	25
118	1	1	1610	125,6			25				
	2	6	1610	"	78		44			19	25
	3	6	1610	"	78		63			38	25
125	1	1	1610	132,6			25				
	2	6	2012	"	82		44			12	32
	3	6	2012	"	82		63			31	32
	4	7	2012	"	82		82			25	32
	5	5/6	2012	"	82		101			69	32
132	1	1	1610	139,6			25				
	2	6	2012	"	89		44			12	32
	3	6	2012	"	89		63			31	32
	4	7	2012	"	89		82			25	32
	5	5	2517	"	89		101			56	45
140	1	1	1610	147,6			25				
	2	6	2012	"	97		44			12	32
	3	6	2012	"	97		63			31	32
	4	7	2517	"	97		82			18,5	45
	5	7	2517	"	97		101			28	45
	6	7	2517	"	97		120			37,5	45
	8	7	2517	"	97		158			56,5	45
	150	1	1	1610	157,6			25			
2		6	2012	"	107		44			12	32
3		6	2517	"	107		63			18	45
4		7	2517	"	107		82			18,5	45
5		7	2517	"	107		101			28	45
6		7	2517	"	107		120			37,5	45
160	1	1	1610	167,6			25				
	2	6	2012	"	117		44			12	32
	3	6	2517	"	117		63			18	45
	4	7	2517	"	117		82			18,5	45
	5	7	2517	"	117		101			28	45
	6	7	3020	"	117		120			34,5	51
	8	7	3020	"	117		158			53,5	51
	170	1	1	1610	177,6			25			
2		6	2012	"	127		44			12	32
3		6	2517	"	127		63			18	45
4		7	2517	"	127		82			18,5	45
5		7	3020	"	127		101			25	51
6		7	3020	"	127		120			34,5	51
180	1	14	1610	187,6	137		25				
	2	4	2517	"		80 120	44		45		
	3	6	2517	"	137		63			18	45
	4	7	2517	"	137		82			18,5	45
	5	7	3020	"	137		101			25	51
	6	7	3020	"	137		120			34,5	51
	8	7	3030	"	137		158			41	76

Výpočtový Ø Dp	Počet drážek	Provedení	Upínací pouzdro	Venkovní Ø De	Di	Dm	F	L	P	R	S
190	1	10	2012	197,6	147	100	25	32	3,5		
	2	4	2517	"		120	44	45	1		
	3	6	2517	"	147		63			18	45
	4	7	2517	"	147		82			18,5	45
	5	7	3020	"	147		101			25	51
	6	7	3020	"	147		120			34,5	51
	8	7	3030	"	147		158			41	76
	200	1	10	2012	207,6	157	100	25	32	3,5	
2		4	2517	"		120	44	45	1		
3		6	2517	"	157		63			18	45
4		6/7	3020	"	157		82			15,5	51
5		7	3020	"	157		101			25	51
6		7	3020	"	157		120			34,5	51
8		7	3535	"	161		158			34,5	89
212		1	10	2012	219,6	169	100	25	32	3,5	
	2	8	2517	"	169	120	44	45	1		
	3	15	2517	"	169	120	63			18	45
	4	7	3020	"	169		82			15,5	51
	5	7	3020	"	169		101			25	51
	6	7	3535	"	169		120			15,5	89
	8	7	3535	"	173		158			34,5	89
	224	1	10	2012	231,6	181	100	25	32	3,5	
2		8a	2517	"	181	120	44	45	1		
3		15	2517	"	181	120	63			18	45
4		6/7	3020	"	181		82			15,5	51
5		7	3020	"	181		101			25	51
6		7	3535	"	181		120			15,5	89
8		7	3535	"	185		158			34,5	89
236		1	10	2012	243,6	193	100	25	32	3,5	
	2	8a	2517	"	193	120	44	45	1		
	3	15	2517	"	193	120	63			18	45
	4	7	3020	"	193		82			15,5	51
	5	7	3535	"	193		101			6	89
	6	7	3535	"	193		120			15,5	89
	8	7	3535	"	197		158			34,5	89
	250	1	10	2012	257,6	207	100	25	32	3,5	
2		8a	2517	"	207	120	44	45	1		
3		15	3020	"	207	150	63			12	51
4		9	3020	"	207	150	82			15,5	51
5		7	3535	"	207		101			6	89
6		7	3535	"	207		120			15,5	89
8		7	3535	"	207		158			34,5	89
280		1	10	2012	287,6	237	100	25	32	3,5	
	2	8a	2517	"	237	120	44	45	1		
	3	9	3020	"	237	150	63			6	51
	4	9	3020	"	237	150	82			15,5	51
	5	9	3535	"	237	170	101			6	89
	6	9	3535	"	237	170	120			15,5	89
	8	9	3535	"	237	175	158			34,5	89
	300	1	10	2012	307,6	257	100	25	32	3,5	
2		8a	2517	"	257	120	44	45	1		
3		9	3020	"	257	150	63			6	51
4		9	3020	"	257	150	82			15,5	51
5		9	3535	"	257	170	101			6	89
6		9	3535	"	257	170	120			15,5	89
8		9	3535	"	257	170	158			34,5	89

Venkovní Ø Dp	Počet drážek	Provedení	Upínací pouzdro	Venkovní ØDe	Di	Dm	F	L	P	R	S		
315	1	10	2012	322,6	272	100	25	32	3,5				
	2	8a	2517	"	272	120	44	45	1				
	3	9	3020	"	272	150	63			6	51		
	4	10	3535	"	272	170	82	89	3,5				
	5	9	3535	"	272	170	101			6	89		
	6	9	3535	"	272	170	120			15,5	89		
	7	9	3535	"	272	170	120			34,5	89		
	8	9	3535	"	272	175	158						
335	2	8a	2517	342,6	292	120	44	45	1				
	3	9	3020	"	292	150	63			6	51		
	4	10	3535	"	292	170	82	89	3,5				
	5	9	3535	"	292	170	101			6	89		
	6	9	3535	"	292	170	120			15,5	89		
	7	9	3535	"	292	170	120			34,5	89		
	8	9	3535	"	292	175	158						
	355	2	11	3020	362,6	312	150	44	51	3,5			
3		12	3020	"	312	150	63			6	51		
4		10	3535	"	312	170	82	89	3,5				
5		12	3535	"	312	170	101			6	89		
6		9	3535	"	312	170	120			15,5	89		
7		9	3535	"	312	170	120			34,5	89		
8		9	3535	"	312	170	158						
400		2	11	3020	407,6	357	150	44	51	3,5			
	3	11	3535	"	357	170	63	89	13				
	4	11	3535	"	357	170	82	89	3,5				
	5	12	3535	"	357	170	101			6	89		
	6	12	3535	"	357	170	120			15,5	89		
	7	12	4040	"	357	200	158			28	102		
	8	12	4040	"	357	200	158						
	450	2	11	3020	457,6	407	150	44	51	3,5			
3		13	3535	"	407	170	63	89	26				
4		13	3535	"	407	170	82	89	7				
5		16	3535	"	407	170	101			12	89		
6		16	4040	"	407	200	120			18	102		
7		12	4040	"	407	200	158			28	102		
8		12	4040	"	407	200	158						
500		2	11	3020	507,6	457	150	44	51	3,5			
	3	13	3535	"	457	170	63	89	26				
	4	13	3535	"	457	170	82	89	7				
	5	16	3535	"	457	170	101			12	89		
	6	16	4040	"	457	200	120			18	102		
	7	12	4040	"	457	200	158			28	102		
	8	12	4040	"	457	200	158						
	560	2	17	3030	567,6	517	150	44	76	28			4
3		13	3535	"	517	170	63	89	26				
4		13	3535	"	517	170	82	89	7				
5		13	4040	"	517	200	101	102	1				
6		16	4040	"	517	200	120			18	102		
7		12	4545	"	517	225	158			22	114		
8		12	4545	"	517	225	158						
630		3	13	3535	637,6	587	170	63	89	26			
	4	13	3535	"	587	170	82	89	7				
	5	13	4040	"	587	200	101	102	1				
	6	16	4040	"	587	200	120			18	102		
	7	12	4545	"	587	225	158			22	114		
	8	12	4545	"	587	225	158						
	710	3	17	3535	717,6	664	170	63	89	22			4
		4	11	3535	"	664	170	82	89	3,5			
5		11	4040	"	664	200	101	102	0,5				
6		12	4545	"	664	225	120			3	114		
7		12	4545	"	664	225	158			22	114		
8		12	4545	"	664	225	196			41	114		
800		3	17	3535	807,6	754	170	63	89	22			4
		4	17	4040	"	754	200	82	102	16			4
	5	11	4040	"	754	200	101	102	0,5				
	6	12	4545	"	754	225	120			3	114		
	7	12	4545	"	754	225	158			22	114		
	8	12	4545	"	754	225	196			41	114		
	1000	3	17	4040	1007,6	954	200	63	102	33			6
		4	17	4040	"	954	200	82	102	16			4
5		11	4545	"	954	225	101	114	6,5				
6		12	4545	"	954	225	120			3	114		
7		12	5050	"	954	245	158			15,5	127		
8		12	5050	"	954	245	196			34,5	127		
1250		4	11	4545	1257,6	1204	225	82	114	16			
		5	11	4545	"	"	225	101	114	16			
	6	11	5050	"	"	245	120	127	3,5				
	7	12	5050	"	"	245	158			15,5	127		
	8	12	5050	"	"	245	196			34,5	127		
	1250	9	11	4545	"	"	225	82	114	16			
		10	11	4545	"	"	225	101	114	16			
		11	11	5050	"	"	245	120	127	3,5			
12		12	5050	"	"	245	158			15,5	127		